

Restaurant POS

A3315 M73, 15" POS

Elegant

DURABLE

Designed for Power User

FAN-LESS

Reliable




KEY FEATURES



Super bright LCD

600 nits TFT LED LCD provides a bright image, suitable for outdoor use




Desktop/Server CPU

Socket mount design gives the freedom to choose and to upgrade when it's needed



IP65

IP65 water and dust proof protection (front only).

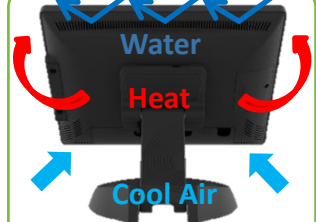

Ventilation System

Patented ventilation system allows heat gets out but prevents liquid from outside.



Super Rich I/O

6xUSB, 4xCOM, 1xVGA/
1xHDMI OUT, 1xcash drawer, 1xLAN, 1xMIC IN/Audio OUT, 1xParallel*




Dual Hinges

Dual hinges stand gives the flexibility to fold as wedge POS and space-saving for shipping



Secure



Cable cover helps to prevent unauthorized tampering.

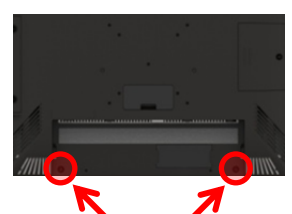


Easy Service

Just two screws to reach the major components, such as MB, LCD,...etc.

Dimension

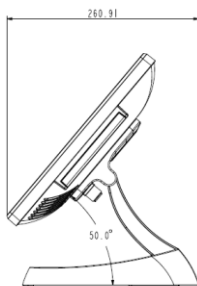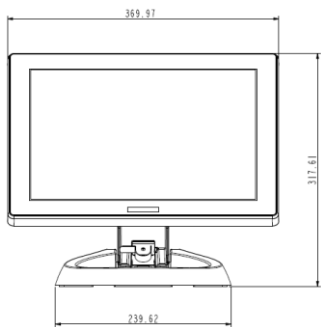

I/O Interface

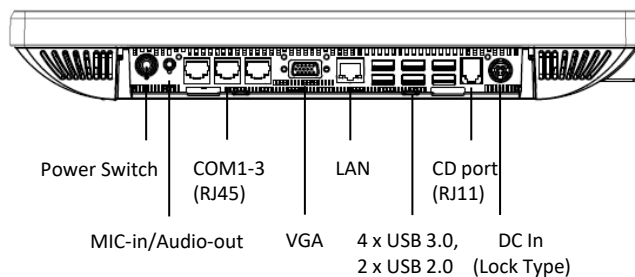

Specification

Model		Restaurant POS, A3315 M73	
CPU Support		Intel® 8 th Generation Coffee Lake (9 th Gen upon request) Core-i7 8700T 4.00GHz (6Cores) Core-i5 8500T 2.10GHz (6Cores) / Core i3 8100T 3.10GHz (4 Cores) Pentium G5400T 3.10GHz (2 Cores) / Celeron G4900T 2.90GHz (2 Cores)	
System Memory		2 x SO-DIMM, DDR4 (Max. 64GB)	
Storage	HDD	1 x 2.5" HDD (Optional)	
	SSD	1 x 2.5" SSD / 1 x M.2 (2240/2260/2280) SSD	
LCD	Size	15" TFT LED LCD Panel	
	Brightness	350cd/m ² (Standard) / 600cd/m ² (Optional)	
	Resolution	1024 x 768	
Touch Screen		True-Flat Projected Capacitive Touch / Resistive Touch	
Tilt Angle		0 ~ 120 degree	
External I/O Port	Rear	4 x USB 3.0 Ports & 2 x USB 2.0	
		4 x Serial ports (3 x RJ45 & 1 x extension cable); (Power enabled by BIOS; 0/5/12V)	
		1 x Parallel port* (Optional, by an extension cable)	
		1 x VGA (Power enabled by BIOS; +12V) / 1 x HDMI (Optional)	
		1 x Cash Drawer Port (RJ11; +12/24V)	
		1 x LAN (10/100/1000)	
		1 x Mic-In/Speaker-out (Combo Jack)	
Speaker		1 x DC In	
Power		1 x Power Switch	
EMC Safety		2 x 2W speaker (Optional)	
Environment	Operating Temperature	External power adapter, 84W/12V (Lock type)	
	Storage Temperature	CE, FCC Class A	
	Operating Humidity	0°C ~ 35°C	
	Storage Humidity	-20°C ~ 60°C	
Security & Reliability		20% - 85% RH non condensing	
OS Support		20% - 85% RH non condensing	
Peripherals	MSR (USB)	TPM 2.0	
	Customer display	Windows® 11 / Windows® 10 IoT/ Linux per request	
	2nd Display	MSR / MSR + Finger Print (Combo) / MSR + i-Button (Combo) / MSR + RFID (Combo) / MSR + EMV + RFID (Combo)	
	Stand	Flush mount VFD display, 2x20 characters	
System Dimension (W x D x H)		9.7" (1024 x 768) 9.7" (1024 x 768) / 15" (1024 x 768) / 15.6" (1366 x 768)	
Weight (N.W./G.W.)		Type A / B / C / D / E / F (Default)	
Packing Information	Carton Dimension (W x L x H)	369.97 x 260.91 x 317.61 mm (With Stand)	
	# Carton per Pallet (105 x 100 cm)	6 kgs(N.W.) / 7 kgs(G.W.)	
		For the system with Stand Type A, B, C, E	For the system with Stand Type D, F
Packing Information		30 x 47 x 41.5 cm	21.2 x 49.2 x 41.5 cm
		30 cartons (300 units in a 20-foot container)	40 cartons (400 units in a 20-foot container)